

STANDARD



ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- 1.2 watts (12 LEDs x 0.1 watt) per head, 205 lumen output.
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

ELECTRICAL

- Dual 120-277 voltage.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- 3.6V 1000mAH long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Low voltage battery disconnection preventing deep discharge damage to the battery.

MOUNTING

- Universal mounting plate with EZ quick connect for rapid installation.
- Suitable for wall or ceiling mount.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.


OPTIONS

- STD: Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries three years.
- UL listed for damp locations. (0°C – 40°C)
- Meets UL924 and NEC

DIMENSIONS

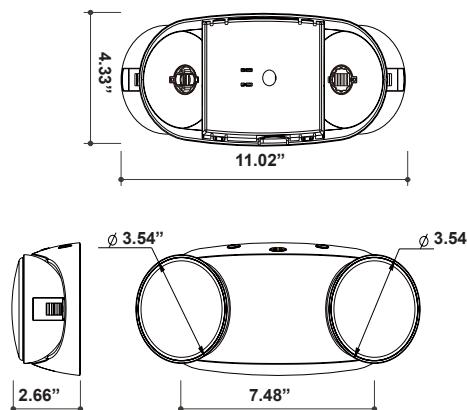

ORDERING INFORMATION

Model	Housing Color	Options
LEDR5	White	SDT Self diagnostic

PACKING INFORMATION

Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross weight (Kg)
6	30x23.5x24.5	0.0172	4

Damp location is only for low or high temperature operation not for dust-proof or water-proof

Specifications and dimensions subject to change without notice.